

KSF

Shopfront



A robust system designed thinking of its installation on shopfronts, KSF combines durability and a modern design that maximizes the glazed area with an excellent value for money. This door is not only an excellent option for exterior, it is also good choice to interior spaces.

- Range of shop front & door sections available
- Double & single door profiles available
- Choice of top rails, bottom rails and a mid-rails available
- Screw port fixing for shop front sections
- Multiple glass thickness' available from 6 to 28,8 mm double glazing
- Internally beaded for increased security
- Sections available for use with auto gearing as well as manual pivot

TECHNICAL FEATURES

A Design

KSF Shopfront offers fabricators complete flexibility of construction on sites when robustness is a key factor. This system has wide stile variants like cleated or tie rodged door sash construction with standard.

B Features

For ease of fabrication, KSF Shopfront has been designed with square cut and screw ported framing sections.


To comply with current guidelines, this door system has an anti-finger trap "bulb" and half "bulb" stile option, without the need for a mid-rail when fitting panic gearing.

C Benefits

KSF Shopfront has been tested according to the BS6375-1 2015 standard for Air, Water and Wind resistance to ensure all its benefits and guarantee its safety.

D Possibilities

This is a versatile system where multiple door operations are available. You can choose from double action single and double doors using a COHC. Dedicated auto gearing header bar and robust sliding door profiles complete the range, offering full design flexibility. KSF range is completed with threshold options: DDA compliant low threshold with an option to incorporate drainage, a fully rebated gasketed cill or a flat backed cill for use with the auto door profiles or to butt up to internal finishes.

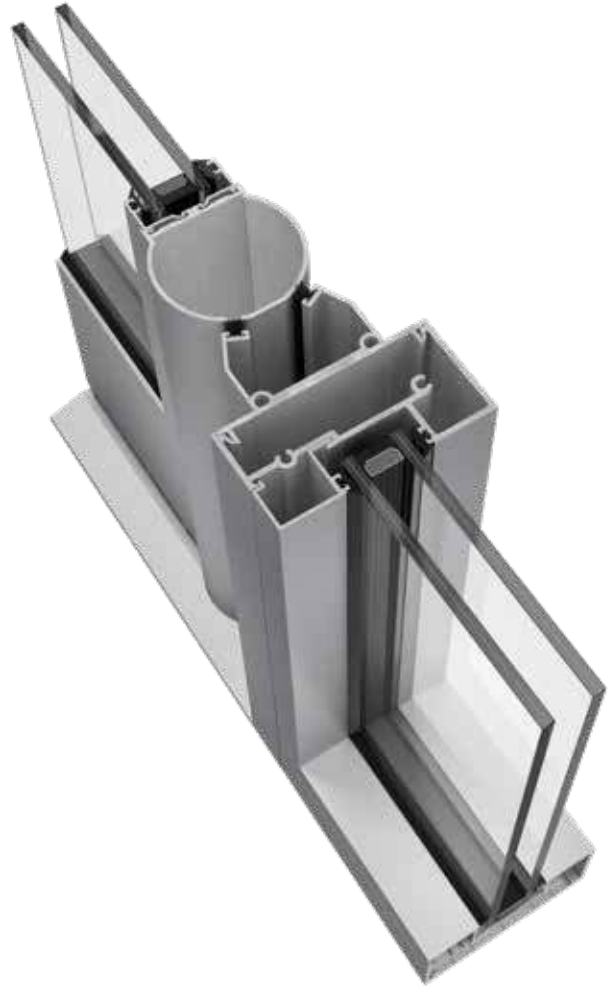

Maximum leaf size	1150x2400 mm
Maximum weight	65 kg
Maximum glazing	28,8 mm framing 32,8 mm door

